


WEBER MANUFACTURING TECHNOLOGIES INC.
16566 HIGHWAY #12, MIDLAND, ONTARIO L4R 4L1

ANNUAL ENVIRONMENTAL REPORTING
2025

REPORT PREPARED BY:
O2E Inc.

REPORT PREPARED FOR:
WEBER MANUFACTURING TECHNOLOGIES INC.

APRIL 2, 2026

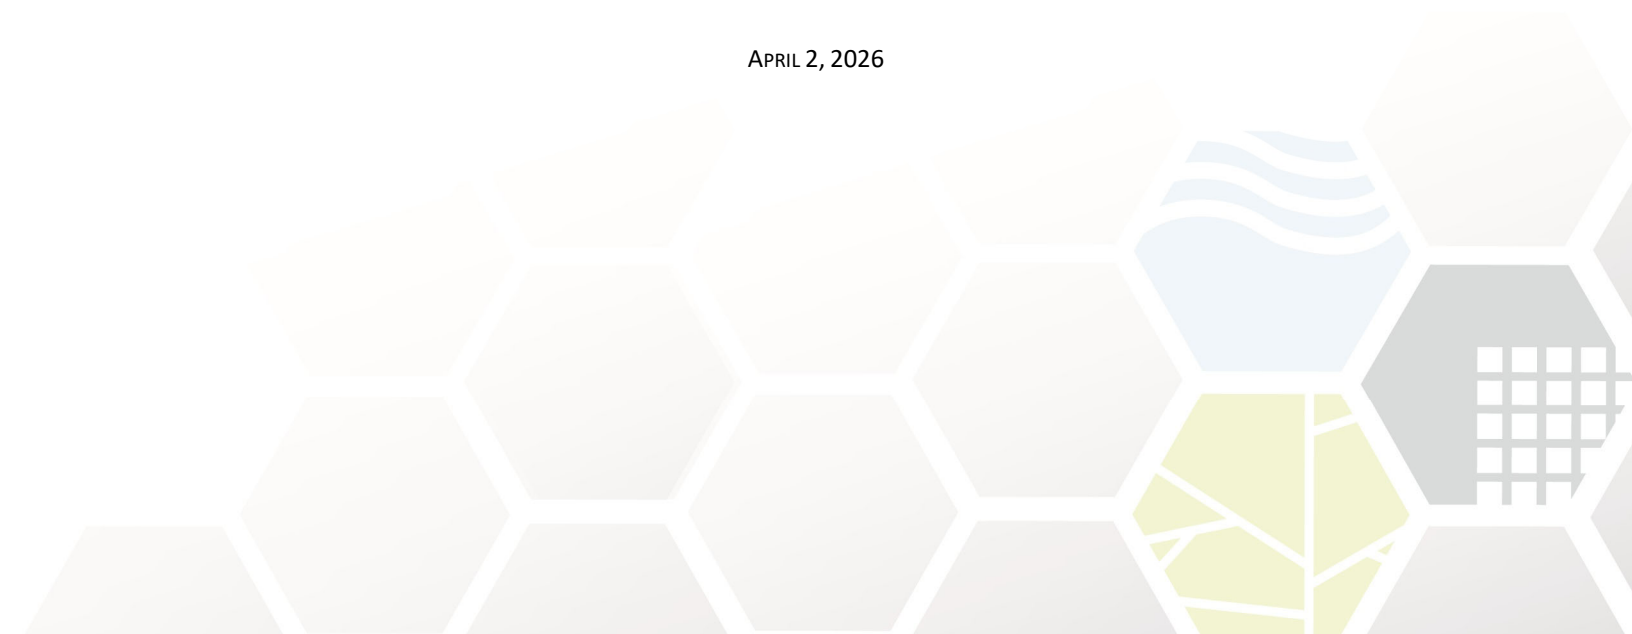

April 2, 2026

Mr. Chris Holsgrove
Weber Manufacturing Technologies Inc.
16566 Highway #12
P.O. Box 399
Midland, Ontario
L4R 4L1

**Re: Annual Environmental Reporting
Weber Manufacturing Technologies Inc.
O2E Reference #25-116**

Delivery

Dear Chris:

Weber Manufacturing Technologies Inc. (Weber) retained O2E Inc. (O2E) to collect site information, perform calculations and prepare the annual report required by Environment and Climate Change Canada (ECCC) under the National Pollutant Release Inventory (NPRI) and Greenhouse Gas (GHG) reporting program for the Weber Manufacturing and NVD facilities in Midland. This letter summarizes the reportable releases for these annual requirements.

CHANGES TO REPORTABLE SUBSTANCES AND REPORTING REQUIREMENTS

There were several changes made to the NPRI substance list and reporting requirements for the 2025 reporting year. A summary of these changes is provided below.

Additions to the Reportable Substance List

Substance Name	CASRN	NPRI Part	Reporting Threshold
Basic Blue 7	2390-60-5	Part 1B	100 kg MPO, 1% conc.
Basic Violet 3	548-62-9	Part 1B	100 kg MPO, 1% conc.
Basic Violet 4	2390-59-2	Part 1B	100 kg MPO, 1% conc.
MAPBAP Acetate	72102-55-7	Part 1B	100 kg MPO, 1% conc.
Benzothiazoles that can form 2-mercaptobenzothiazole	NA - 50	Part 1B	100 kg MPO, 0.1% conc.
Long-chain aliphatic amines	NA - 48	Part 1B	5000 kg MPO, 0.1% conc.
Free cyanide, cyanide salts, and cyanide complexes	NA - 49	Part 1B	1000 kg MPO, 0.1% conc.

In addition, 163 per- and polyfluoroalkyl substances (PFAS) were added to a new Part 1, Group C, of the substance list. Facilities that manufacture, produce, or otherwise use 1kg or more of a listed PFAS at a concentration of 0.1% by weight or more are required to report quantities of that PFAS that are released, disposed of and recycled.

Adjustments to Reporting Thresholds – Substances Moved to Part 1B

Substance Name	CASRN	NPRI Part	Reporting Threshold
Hydrogen Cyanide	74-90-8	Part 1B	1000 kg MPO, 0.1% conc.
C.I. Basic Green 4 (now Malachite Green)	569-64-2	Part 1B	100 kg MPO, 1% conc.
Ethylene Oxide	75-21-8	Part 1B	1 kg MPO, 0.1% conc.

Deleted Substances

Substance Name	CASRN	NPRI Part
2-Mercaptobenzothiazole	149-30-4	Part 1A

RESULTS

The results of the assessment show that the Manufacturing facility is not required to report to ECCC under the requirements of the NPRI. Supporting information for the determination of contaminant emission estimates and threshold comparisons is presented in **Attachment 1** and includes such items as production inputs, emission calculations, operating hours, etc. A summary of the contaminants included in the assessment for this year is presented in the following table.

Table 1: Reportable Contaminants for Year 2025 – NVD Facility

Contaminant	CAS	NPRI Release Report Entry - Tonnes				
		Air		Water	Disposal	Recycle
		Point	Fugitive			
Nickel (and its compounds)	NA – 06	0.012	NA	0.000	0.000	3.130

A summary of the facility’s annual production information is provided in **Attachment 1**. The confirmation notice and report summary are attached to this report in **Attachment 2**.

Reported substance quantities remain essentially unchanged from the previous reporting period.

NPRI REPORTING

The annual report submission for the NVD facility was completed on-line using the web based Single Window Information Manager (SWIM) portal. The reports were submitted to the appropriate agencies on April 2, 2026. A copy of the submission for the NVD facility has been provided in **Attachment 3**. The report can also be viewed through the SWIM website. Report certification was completed electronically when the report was submitted on the above noted date.

A review of the potential for NPRI Part 1C substances (PFAS) was conducted through a review of chemicals used in the manufacturing processes and a review of available literature. The results of this review indicate that PFAS are not expected in the materials used in the production of pulp and newsprint products nor are they expected as by-products of any facility processes. As such, the facility is not expected to meet the reporting thresholds for any NPRI Part 1C substances.

GREENHOUSE GAS EMISSIONS REPORTING

ECCC Methodology

An assessment of greenhouse gas emissions was completed for the facility. The assessment was based on quantities of fossil fuels burned in the previous calendar year for stationary and mobile equipment. In order to calculate emissions of greenhouse gases from fossil fuel combustion, the quantity of each fuel used was multiplied by the applicable ECCC emission factor to arrive at an annual emission of the three main greenhouse gases produced from fossil fuel combustion: Carbon Dioxide (CO₂), Nitrous Oxide (N₂O) and Methane (CH₄). All calculations for fuel combustion were completed in accordance with the guidance provided by ECCC in their document entitled "Greenhouse Gas Reporting Program – Canada's Greenhouse Gas Quantification Requirements Version 8.0" dated December 2024, specifically Chapter 2 – Quantification Methods for Fuel Combustion and Flaring. The following equations from the aforementioned documents were used to calculate releases of greenhouse gases from the fuels used at the site:

- Carbon dioxide emissions from fossil fuels (except natural gas) and biomass:
 - Equation 2-2: Volume or Mass based Non-Variable Fuels Equation
- Carbon dioxide emissions from natural gas:
 - Equation 2-9: Carbon Dioxide High Heat Value Method
- Methane and nitrous oxide emissions from natural gas:
 - Equation 2-12: CH₄ and N₂O High Heat Value Methods, in Energy Units
- Methane and nitrous oxide emissions from fossil and biomass fuels:
 - Equation 2-13: CH₄ and N₂O High Heat Value Methods, in Physical Units

MECP Methodology

Calculations of CO₂e releases from stationary combustion sources and onsite transportation are based on the standard quantification methods listed in the MECP document entitled "Guideline for Quantification, Reporting and Verification of Greenhouse Gas Emissions – August 2025", specifically Appendix 11 - ON.20 Fuel Combustion and Flaring. Note that the MECP has referenced the standard quantification methods published by ECCC in their guidance document, including the use of the IPCC Fifth Assessment Report Global Warming Potentials and greenhouse gas emissions from on-site transportation sources.

Summary of Emission Factors and Equations

Emission factors and equations used to calculate releases of greenhouse gases from the various fuels used by the facility were obtained from the ECCC document entitled "Greenhouse Gas Reporting Program – Canada's Greenhouse Gas Quantification Requirements – Version 8.0" dated December 2024 and are summarized below.

Table 2: Summary of Emission Factors

Fuel Type	CO ₂	CH ₄	N ₂ O
Natural Gas	1966.86 g/m ³	0.98 g/GJ	0.87 g/GJ
Diesel (mobile)	2,681 g/L	0.073 g/L	0.02 g/L
Propane (mobile)	1515 g/L	0.024 g/L	0.108 g/L

Equation 2-2: Volume or Mass based Non-Variable Fuels Equation (CO₂)

$$CO_{2i} = \sum_{p=1}^n Fuel_{ip} \times EF_{2i} \times 10^{-6}$$

Where:

CO_{2i} = Annual mass of CO₂ emissions for a specific fuel type “i” (tonnes)

n = Number of measurement periods for the calendar year

Fuel_{ip} = Mass or volume of fuel type “i” combusted in measurement or delivery period “p” (mass in tonnes for solid fuel, volume in kilolitres for liquid fuel or volume in cubic meters, at 15°C and 101.325 kPa, for gaseous fuel)

EF_{2i} = Fuel type “i” specific CO₂ emission factors

10⁻⁶ = Conversion factor from grams to metric tonnes.

Equation 2-9: Natural Gas (Variable Fuels Method)

$$CO_{2NG} = \sum_{p=1}^n Fuel_p \times (Slope \times HHV_p - Intercept) \times 10^{-6}$$

Where:

CO_{2i} = Annual mass of CO₂ emissions from natural gas (tonnes)

n = Number of fuel heat content measurement periods for the calendar year

Fuel_{ip} = Volume of natural gas fuel combusted during measurement period “p” (cubic meters at 15°C and 101.325 kPa), as specified in Sections 2.C.1 and 2.C.2.

HHV_p = High heat value of natural gas for the measurement period “p” (MJ/cubic meter, at 15°C and 101.325 kPa), as specified in Sections 2.C.1 and 2.C.3.

(Slope × HHV_p – Intercept)

= Empirical equation (g of CO₂/cubic meter of natural gas) representing a very close relationship between carbon dioxide and volume of natural gas determined from composition data of a large discrete set of available data, in this case, Slope = 66.20 and Intercept = 617.7

10⁻⁶ = Conversion factor from grams to metric tonnes.

Equation 2-12: CH₄ and N₂O High Heat Value Methods, in Energy Units

$$CH_{4i} \text{ or } N_2O_i = \sum_{p=1}^n Fuel_{ip} \times HHV_{ip} \times 10^{-3} \times EF_i \times 10^{-6}$$

Where:

- CH_{4i} or N₂O_i = Annual mass of CH₄ or N₂O emissions for fuel type “i”, tonnes per year
n = Number of measurement periods for the calendar year
Fuel_{ip} = Mass or volume of fuel type “i” combusted in measurement or delivery period “p” (mass in tonnes for solid fuel, volume in kilolitres for liquid fuel or volume in cubic meters, at 15°C and 101.325 kPa, for gaseous fuel)
HHV_{ip} = High heat value measured directly or provided by the fuel supplier for the measurement period “p” of fuel type “i” (MJ per tonne for solid fuel, MJ per kilolitre for liquid fuel, or MJ per cubic meter, at 15°C and 101.325 kPa, for gaseous fuel)
EF_i = Fuel type “i” specific CH₄ or N₂O emission factors in energy units
10⁻⁶ = Conversion factor from grams to metric tonnes.
10⁻³ = Conversion factor from megajoules to gigajoules.

Equation 2-13: CH₄ and N₂O High Heat Value Methods, in Physical Units

$$CH_{4i} \text{ or } N_2O_i = \sum_{p=1}^n Fuel_{ip} \times EF_i \times 10^{-6}$$

Where:

- CH_{4i} or N₂O_i = Annual mass of CH₄ or N₂O emissions for fuel type “i”, tonnes per year
n = Number of measurement periods for the calendar year
Fuel_{ip} = Mass or volume of fuel type “i” combusted in measurement or delivery period “p” (mass in tonnes for solid fuel, volume in kilolitres for liquid fuel or volume in cubic meters, at 15°C and 101.325 kPa, for gaseous fuel)
EF_{2i} = Fuel type “i” specific CH₄ or N₂O emission factors
10⁻⁶ = Conversion factor from grams to metric tonnes.

RESULTS – ECCC and MECP

A summary of the reportable contaminants as carbon dioxide equivalents (CO_{2e}) for the reporting period is presented in the following table. Facility operations included in the assessment consist of stationary combustion equipment and on-site transportation equipment. Supporting information for emission estimates is presented in **Appendix 4** and includes such items as production inputs, emission calculations, etc.

Table 3A: Summary of CO₂e Emissions – Threshold 10,000 tonnes – Manufacturing Facility

Parameter	Releases (tonnes)	GWP	CO ₂ e (tonnes)
Carbon Dioxide	1,272.980	1	1,272.980
Methane	0.025	28	0.693
Nitrous Oxide	0.022	265	5.826
Total	NA	NA	1,279.499

Table 3B: Summary of CO₂e Emissions – Threshold 10,000 tonnes – NVD Facility

Parameter	Releases (tonnes)	GWP	CO ₂ e (tonnes)
Carbon Dioxide	2,075.465	1	2,075.465
Methane	0.040	28	1.130
Nitrous Oxide	0.036	265	9.510
Total	NA	NA	2,086.105

The current ECCC/MECP greenhouse gas reporting threshold is 10,000 metric tonnes. As such, the facilities are not required to report under either the ECCC or MECP Greenhouse Gas Reporting programs.

CLOSING


Please feel free to contact us with any questions or comments that you may have with respect to this report.

Sincerely,

O2E INC. ENVIRONMENTAL CONSULTANTS



Tim Logan
President

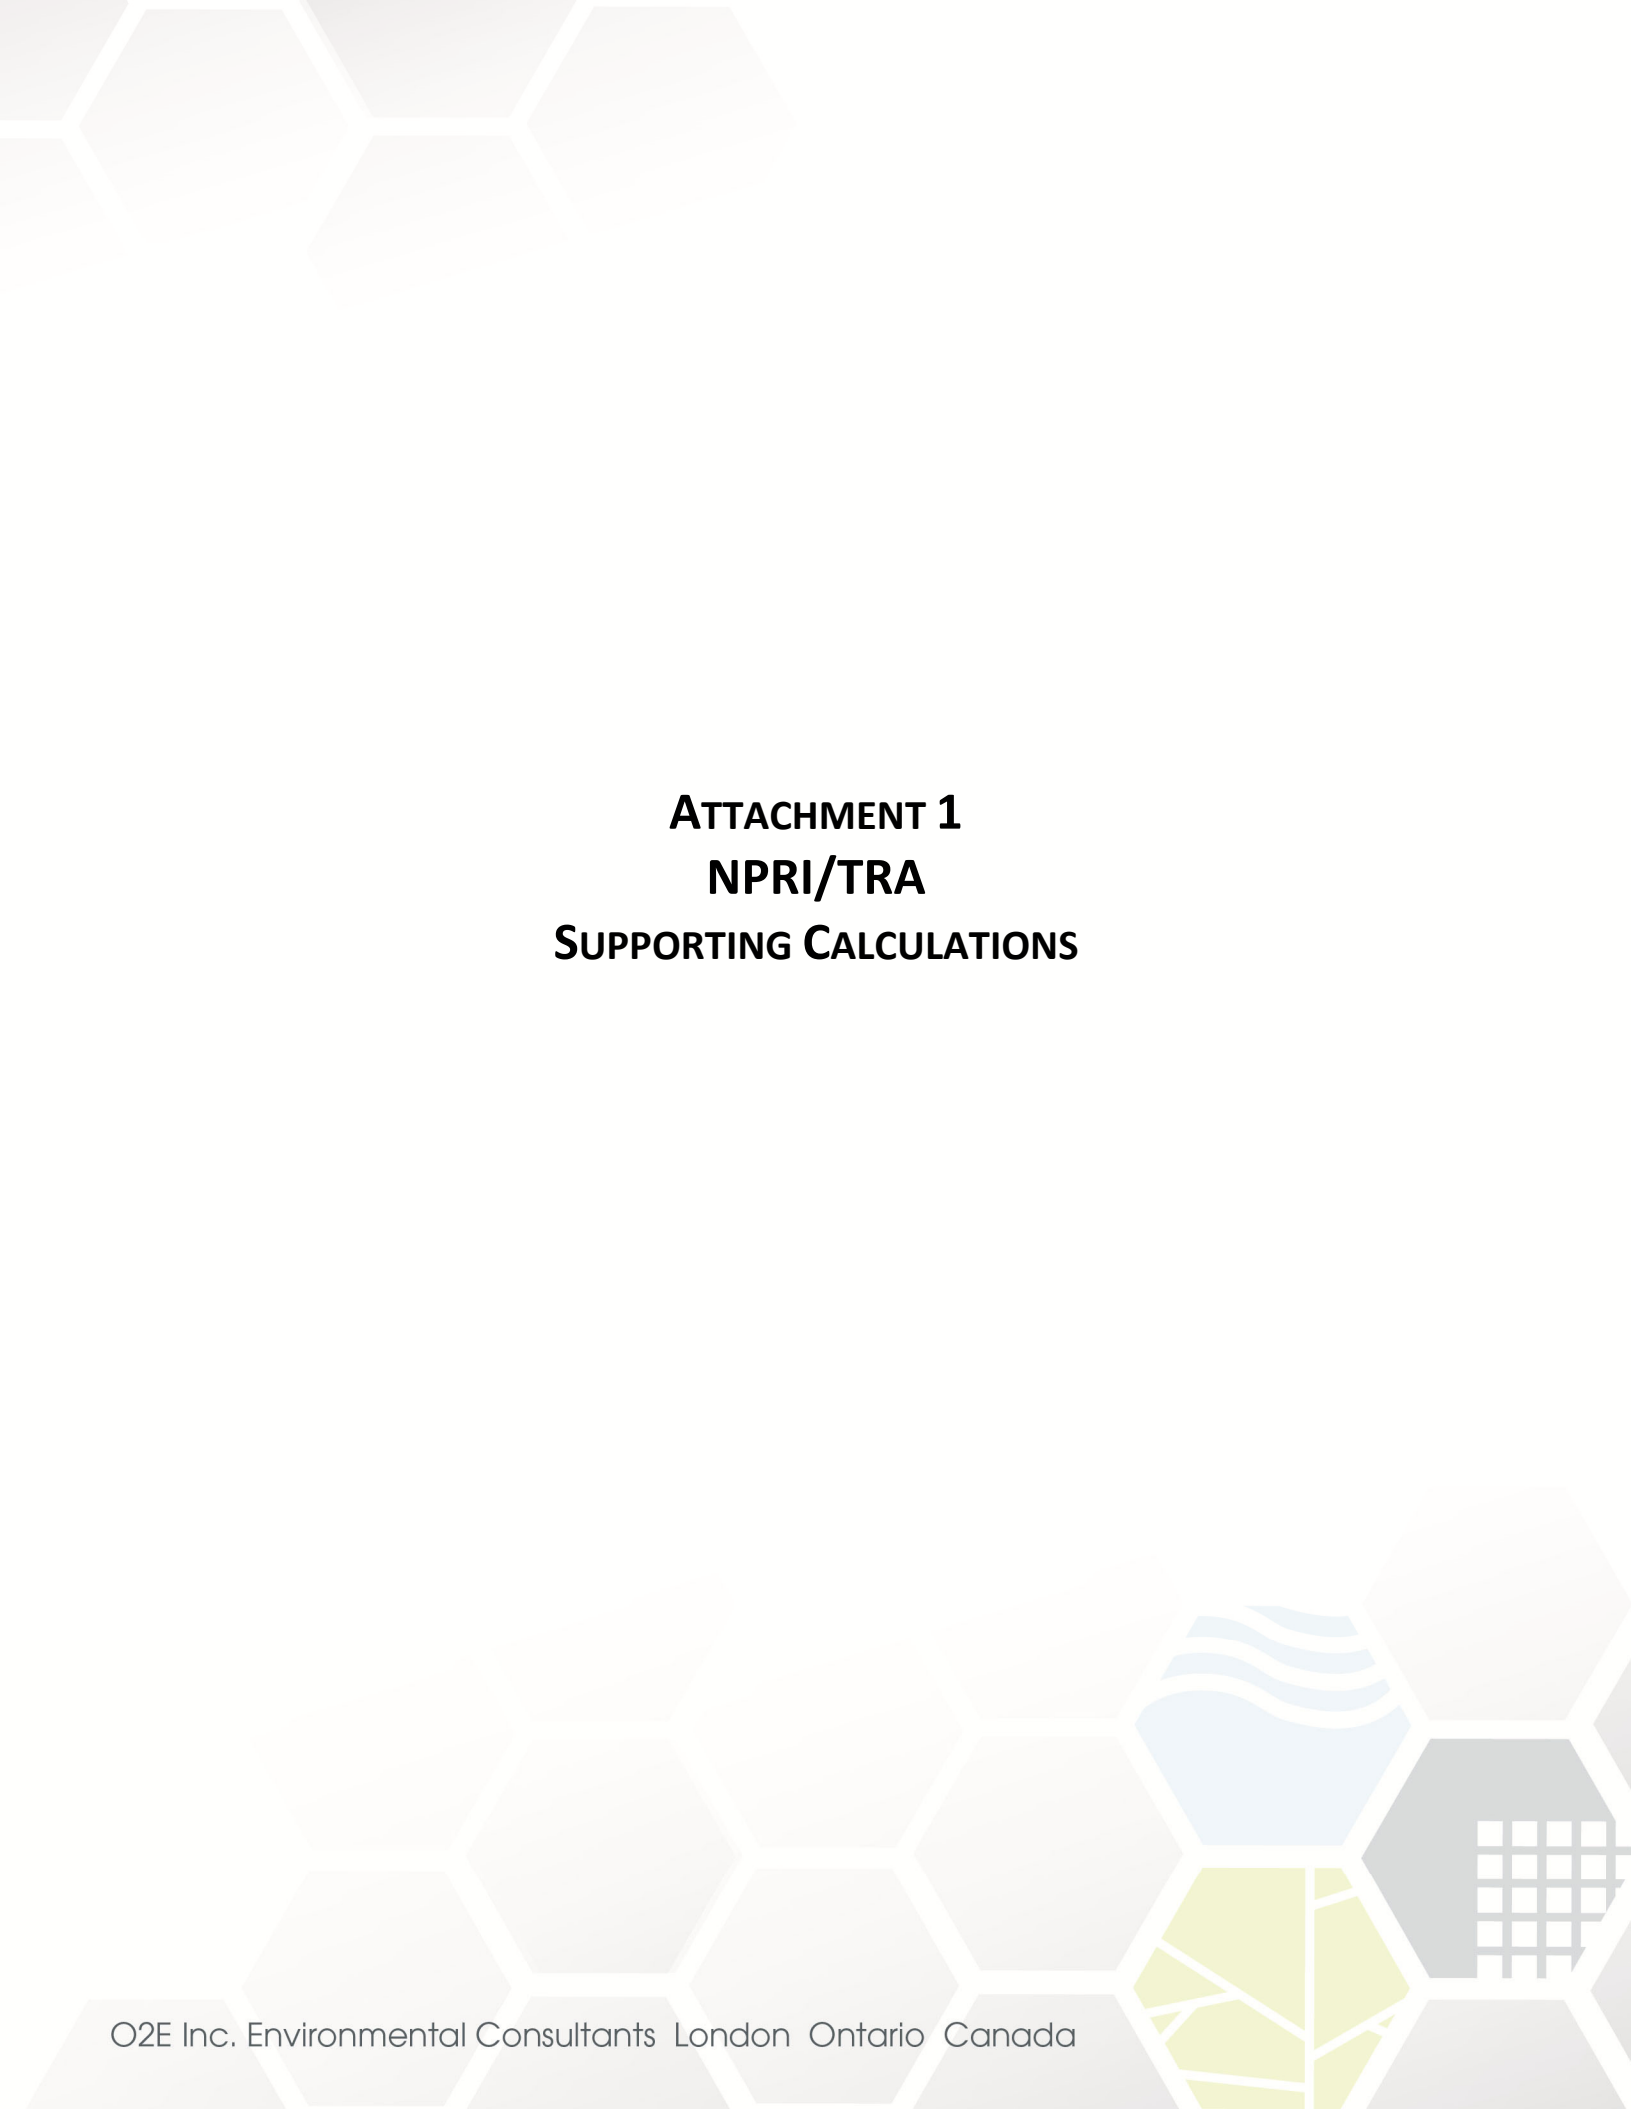

ATTACHMENT 1
NPRI/TRA
SUPPORTING CALCULATIONS

February 23, 2026

Chris Holsgrove
Weber Manufacturing Technologies Inc.
16566 Highway #12
P.O. Box 399
Midland, Ontario
L4R 4L1

Re: Annual Environmental Reporting
O2E Reference #25-116

Dear Chris:

In order to begin the calculations of material releases from your facilities we have prepared the following information request. The request is based on information you have provided in the past for your previous annual submissions. We have included the information presented last year for reference purposes. Please indicate any changes to the information presented, if the information has not changed, feel free to leave the cell blank.

Information Required for Weber Manufacturing

Item	2024 Information	2025 Information
Public Contact	Chris Edwards	Chris Edwards
Technical Contact	Chris Holsgrove	Chris Holsgrove
Number of Employees	215	218
Changes to plant process equipment	No Change	No Change
Welding wire used	412 kg	534 kg
Natural gas used	612,235m3	647,215 m3
Propane used		0
Average number of trucks per day	8	8
Operating hours per week	96	96
Scrap steel recycled (Del Sauniers)	167,980 lbs	115,240 lbs
Aluminum recycled (Del Sauniers)	85,574 lbs	63,970 lbs
Waste oils – Safety-Kleen – disposal 251L	10,648 L	9,213 L
Waste oils – Safety-Kleen – disposal 232 L	0	0
Waste oils – Safety-Kleen – disposal 252L	5300 L	4250L
Graphic Arts Waste – Safety-Kleen – Disposal 265L	0	0
Graphic Arts Waste – Safety-Kleen – Disposal	0	0
Paint/Pigment/Coating Residues – Safety-Kleen – Disposal 145l	1249 L	1472L
Paint/Pigment/Coating Residues – Safety-Kleen – Disposal	0	0
Waste Coolant 253L – Terrapure –disposal	0	0
Silver Solder	1000 lbs	0

Information Required for NVD Plant

Item	2024 Information	2025 Information
Public Contact	Chris Edwards	Chris Edwards
Technical Contact	Chris Holsgrove	Chris Holsgrove
Number of Employees	21	21
Changes to plant process equipment	Added heat Recovery NG	-
Natural gas consumption	1,023,734 m3	1,054,781 m3
Propane used	22	20
Average number of trucks per day	1	1
Operating hours per week	168	168
Scrap nickel recycled	10,237.21	6900 lbs
Total nickel produced	53,101.5 kg	60,966 Kg

Please feel free to contact us if you have any questions regarding the information required.

Sincerely,

O2E INC. ENVIRONMENTAL CONSULTANTS

Tim Logan
President

Weber Manufacturing NPRI Combustion Calculations

2025 Calender Year

Sources:

AP-42 Chapter 1.3 Fuel Oil Combustion, September 1998

AP-42 Chapter 1.4 Natural Gas Combustion, July 1998

Table 1: Emission Factors for Each Contaminant

	Units	NO _x	CO	PM	PM ₁₀	PM _{2.5}	SO ₂	Methane	VOC	N ₂ O
Natural Gas	kg/10 ⁶ m ³	1600	1344	30.4	30.4	30.4	9.6	36.8	88	35.2
# 2 Fuel Oil	kg/10 ³ L	2.4	0.6	0.24	0.1296	0.0996	8.52	0.02592	0.06672	0.0132

Note: Emission factors for Boilers < 100 million BTU/hr (SCC 1-02-005-02/03)

Table 2: Emission Calculations for Each Contaminant based on actual usage (annual)

Annual Gas Consumption (cubic meters)	Annual #2 Fuel Oil Consumption (Litres)	NO _x kg/year	CO kg/year	PM kg/year	PM ₁₀ kg/year	PM _{2.5} kg/year	SO ₂ kg/year	Methane kg/year	VOC kg/year	N ₂ O kg/year
647,215	--	1,036	870	20	20	20	6	24	57	23

Annual Gas Consumption Calender Year (cubic metres)

Total 647,215

Recycled Metals

2025

Scrap steel

115,240 lbs

Main constituent (Iron) is not listed under NPRI

Aluminum

63,970 lbs

reportable to NPRI as fume or dust only

Copper

0 lbs

Low copper alloy - NPRI threshold for Copper (and its compounds) is 10,000 kg annually

MPO Amounts

Silver Solder

0 kg

NPRI threshold for Silver (and its compounds) is 10,000 kg annually.

<u>Class</u>	<u>Quantity (L)</u>	<u>Receiver</u>
252L	4,250	Safety Kleen
232L	0	Safety Kleen
253L	0	Safety Kleen
251L	9,213	Safety Kleen
265I	0	Safety Kleen
265L	0	Safety Kleen
145I	1,472	Safety Kleen
145L	0	Safety Kleen

Contaminant	CAS	Amount in Waste Oil (%)	Annual Quantity Used kg	Annual Releases kg/yr	Reporting Threshold kg/yr	Reportable?	Reportable Emissions kg/yr	Part 5 Threshold	Part 5 Reportable ?	Part 5 Reportable Emissions kg/yr
-------------	-----	-------------------------	----------------------------	--------------------------	------------------------------	-------------	-------------------------------	------------------	---------------------	--------------------------------------

Speciation data is not available for the wastes shipped off-site. The waste oils and coolant are a mixture of oils and water.

Manufacturing Report Summary

Part 4 Release Threshold Assessment

Contaminant	CAS	Annual Emissions kg/yr	Reporting Threshold	Reportable?	Reportable Emissions kg
Oxides of Nitrogen	11104-93-1	1,036	20,000	No	NA
Carbon Monoxide	630-08-0	870	20,000	No	NA
Particulate Matter	NA - M08	20	20,000	No	NA
Inhalable Particulate Matter (PM10)	NA - M09	20	500	No	NA
Respirable Particulate Matter (PM2.5)	NA - M10	20	300	No	NA
Sulphur Dioxide	7446-09-5	6	20,000	No	NA
VOC - including process	NA - M16	57	10,000	No	NA

NVD Plant NPRI Combustion Calculations

2025 Calender Year

Sources:

AP-42 Chapter 1.3 Fuel Oil Combustion, September 1998

AP-42 Chapter 1.4 Natural Gas Combustion, July 1998

Table 1: Emission Factors for Each Contaminant

	Units	NO _x	CO	PM	PM ₁₀	PM _{2.5}	SO ₂	Methane	VOC	N ₂ O
Natural Gas	kg/10 ⁶ m ³	1600	1344	30.4	30.4	30.4	9.6	36.8	88	35.2
# 2 Fuel Oil	kg/10 ³ L	2.4	0.6	0.24	0.1296	0.0996	8.52	0.02592	0.06672	0.0132

Note: Emission factors for Boilers < 100 million BTU/hr (SCC 1-02-005-02/03)

Table 2: Emission Calculations for Each Contaminant based on actual usage (annual)

Annual Gas Consumption (cubic meters)	Annual #2 Fuel Oil Consumption (Litres)	NO _x kg/year	CO kg/year	PM kg/year	PM ₁₀ kg/year	PM _{2.5} kg/year	SO ₂ kg/year	Methane kg/year	VOC kg/year	N ₂ O kg/year
1,054,781	--	1,688	1,418	32	32	32	10	39	93	37

Annual Gas Consumption Calender Year (cubic metres)

Total 1,054,781

Process Emission Calculations

Operating hours
168 per week
50 weeks per year
8,400 hours per year

Nickel Emission rate (source testing)
0.000397 g/s

Nickel Produced
60,966 kg
60.966 tonnes

Nickel Recycled
6,900.0 lbs
3,129.8 kg

		MPO Threshold	Reportable?
Part 1A	NA - 11	10	Yes

Total nickel MPO
64.1078 tonnes

Reportable Releases - Threshold Comparison 2025 to 2024

Part 1A - 10 Tonne MPO Reporting Threshold

Substance	CASRN	Year	Air	Water	Disposal	Recycle
Nickel	NA - 11	2025	0.012	0.000	0.000	3.130
		2024	0.012	0.000	0.000	4.644
		Change	0.000	0.000	0.000	-1.514
		% Change	0.0%	N/A	N/A	-32.6%

NVD Report Summary

Part 4 Release Threshold Assessment

Contaminant	CAS	Annual Emissions kg/yr	Reporting Threshold	Reportable?	Reportable Emissions kg
Oxides of Nitrogen	11104-93-1	1,688	20,000	No	NA
Carbon Monoxide	630-08-0	1,418	20,000	No	NA
Particulate Matter	NA - M08	32	20,000	No	NA
Inhalable Particulate Matter (PM10)	NA - M09	32	500	No	NA
Respirable Particulate Matter (PM2.5)	NA - M10	32	300	No	NA
Sulphur Dioxide	7446-09-5	10	20,000	No	NA
VOC - including process	NA - M16	93	10,000	No	NA

Part 1A - Reportable Summary - Quantities in Mg

Contaminant	CAS	NPRI Reportable?	NPRI Part 5 Reportable?	Annual Release Report Entry			
				Air	Water	Land	
						Disposal	Recycle
Nickel	NA - 11	Yes	NA	0.0120	0.0000	0.0000	3.130



**ATTACHMENT 2
CONFIRMATION NOTICES AND
REPORT SUMMARIES**



Government
of Canada

Gouvernement
du Canada

National Pollutant Release Inventory

SWIM

- › [Reporting Dashboard \(/Weber Manufacturing Technologies Inc./Nickel Vapour Deposition\)](#)
- › Report Submission and Electronic Certification

Report Submission and Electronic Certification

i Note: If there is a change in the contact information for the facility, a change in the owner or operator of the facility, if operations at the facility are terminated, or if information submitted for any previous year was mistaken or inaccurate, please update this information through SWIM or by contacting the National Pollutant Release Inventory directly.


Electronic Statement of Certification

* Specify the language of correspondence

English



Comments (optional)



I hereby certify that I have exercised due diligence to ensure that the submitted information is true and complete. The amounts and values for the facility(ies) identified below are accurate, based on reasonable estimates using available data. The data for the facility(ies) that I represent are hereby submitted to the programs identified below using the Single Window Reporting Application.

I also acknowledge that the data will be made public



Note: Only the person identified as the Certifying Official or the authorized delegate should submit the report(s) identified below.

Company name

Weber Manufacturing Technologies Inc.

Certifying Official

Chris Edwards

Report Submitted by

Tim Logan

* I, the Certifying Official or authorized delegate, agree with the statements above and acknowledge that by pressing the "Submit Selected Report(s)" button, I am electronically certifying and submitting the facility report(s) for the identified company to its affiliated programs.



Report(s) included with submission

Report Year	Facility Name	Province	City	Applicable Program(s)
2025	Nickel Vapour Deposition	Ontario	Midland	NPRI

[Back to Dashboard](#)

Version: 4.1.27.4330-009



Government
of Canada

Gouvernement
du Canada

National Pollutant Release Inventory

Summary Report

General Information

NPRI ID

7097

Company Legal Name

Weber Manufacturing Technologies Inc.

Facility Name

Nickel Vapour Deposition

Facility Address

375 Cranston Crescent, Midland, Ontario, L4R 4K8, Canada

Report Details

Report Year

2025

Programs

NPRI

Report Types

NPRI Inventory


Report Status

Submitted

Substances

CAS RN	Substance Name	Releases	Disposals	Recycling	Unit
NA - 11	Nickel (and its compounds)	0.012		3.13	tonnes

Version: 4.1.27.4330-009



ATTACHMENT 3
SWIM SUBMISSION

Contents

1. General Information
2. Summary of Releases, Disposals and Recycling
3. Releases to Air, Water and Land
4. On-site and Off-site Disposals
5. Recycling
6. Reasons for Adding or Removing Substance(s)
7. Special Reports
8. Feedback
9. Report Submission and Electronic Certification

General Information

Report Details

Report Year: 2025

Report Type(s)/Program(s): NPRI

Report Status: Submitted

Submitted Date: 2026-04-02 9:45:25 AM

Report Creation Type: Prepopulated

Company Idm Id: 15325

Facility Idm Id: 11125

Company Information

Legal Name: Weber Manufacturing Technologies Inc.

Business Number: 855333381

Mailing Address: PoBox 399 Post Office Box 16566 12 Highway, Midland, Ontario, L4R 4L1, Canada

Website: www.webermfg.ca

Parent Company(ies) Information

Name	Business Number	D-U-N-S Number	Percentage Owned	Mailing Address	Additional Information
Zynik Capital Corporation	131891772		100%	General Delivery 1040 West Georgia Street, Vancouver, British Columbia, V6E 4H1, Canada	Suite 950

Contacts

Contact Type	Name	Phone	Extension	Email	Position	Correspondence Language	Company Name
Technical Contact	Chris Holsgrove	705-527-2957		Chris.Holsgrove@webermfg.ca	Maintenance Supervisor	English	
Certifying Official	Chris Edwards	705-527-2930		Chris.Edwards@webermfg.ca	Chief Executive Officer	English	
Public Contact	Chris Edwards	705-527-2930		Chris.Edwards@webermfg.ca	Chief Executive Officer	English	
Company Coordinator	Chris Holsgrove	705-527-2957		Chris.Holsgrove@webermfg.ca	Maintenance Supervisor	English	

Contractor Contact	Tim Logan	519-633-2400		t.logan@o2e.ca	Consultant	English	O2E Inc.
--------------------	-----------	--------------	--	----------------	------------	---------	----------

Facility Information

Facility Name: Nickel Vapour Deposition

Physical Address: 375 Cranston Crescent, Midland, Ontario, L4R 4K8, Canada

Latitude and longitude: 44.730200, -79.864900

Primary NAICS Code: 333511

Number of full-time employee equivalents: 21

Is this a portable facility?: No

Identifiers, Licences, and Permit Numbers

Type of Identifier or Issuing Agency of Permit	Identifier or Permit Number
National Pollutant Release Inventory Identifier	7097
Ontario Ministry of the Environment, Conservation and Parks	5337-4XAJHK

General Reporting Questions

Do you want to report any Part 1A substances?: Yes

Do you want to report any Part 1B substances?: No

Is the facility subject to the Chromium Electroplating, Chromium Anodizing and Reverse Etching Regulations (SOR/2009-162)?: No

Do you want to report any Part 1C substances?: No

Do you want to report any Part 2 substances?: No

Did wood preservation using creosote occur at the facility, and were PAHs released, disposed of, or transferred as a result of wood preservation using creosote?: No

Do any of the following activities take place at the facility, regardless of the number of employees at the facility?: None

Do employees at the facility work a total of 20 000 hours or more AND do any of the following activities take place at the facility?: None

Do you want to report any Part 4 substances?: No

Do you want to report any Part 5 substances?: No

Does the facility have a P2 Plan?: No

Did the facility complete any pollution prevention activities in the current NPRI reporting year?: No

Did the facility operate one or more electricity generating units that had a capacity of 25 MW or more and that distributed or sold to the grid 33% or more of its potential electrical output in the calendar year?: No

Summary of Releases, Disposals and Recycling

Parts 1-3 Substances

CAS RN	Substance Name	Substance Part	Releases	Releases to All Media < 1 tonne	Disposals	Recycling	Unit	Nature of activities	Required / Voluntary
NA - 11	Nickel (and its compounds)	1A	0.012			3.13	tonnes	As a formulation component	Required

Releases to Air, Water and Land

Releases to Air, Water and Land

CAS RN	Substance Name	Substance Part	Type	Release Category	Basis of Estimate	Detail Code	Quantity	Unit
NA - 11	Nickel (and its compounds)	1A	Releases to air	Stack or Point Releases	M3 - Source Testing and Sampling		0.012	tonnes

Reasons for Change, Releases to Air and Land Comments, and Substance Release Comments

CAS RN	Substance Name	Substance Part	Reasons for Change	Nature of "Other Non-Point	Nature of "Other" land release	Substance Release Comment
--------	----------------	----------------	--------------------	----------------------------	--------------------------------	---------------------------

Releases" release comments	comments

NA - 11	Nickel (and its compounds)	1A	No significant change			
---------	----------------------------	----	-----------------------	--	--	--

Parts 1-3 Substances Quarterly Percentage Breakdown

CAS RN	Substance Name	Substance Part	January - March %	April - June %	July - September %	October - December %
NA - 11	Nickel (and its compounds)	1A	25	25	25	25

On-site and Off-site Disposals

Reasons for Disposal, Reasons for Change and Substance Disposal Comments

CAS RN	Substance Name	Substance Part	Reasons for Disposal	Reasons for Change	Substance Disposal Comments
NA - 11	Nickel (and its compounds)	1A		No significant change	

Recycling

Transfers Off-Site for Recycling

CAS RN	Substance Name	Substance Part	Recycling Category	Basis of Estimate	Detail Code	Quantity	Unit
NA - 11	Nickel (and its compounds)	1A	Recovery of metals and metal compounds	C - Mass Balance		3.13	tonnes

Reasons for Recycling, Reasons for Change and Substance Recycling Comments

CAS RN	Substance Name	Substance Part	Reasons for Recycling	Reasons for Change	Substance Recycling Comments
NA - 11	Nickel (and its compounds)	1A	Production Residues, Off-specification products, Unusable parts or discards	Changes in composition of materials released/disposed of/transferred, Other	Decrease in the quantity of off-specification materials sent for recycling.

Off-Site Recycling Locations

CAS RN	Substance Name	Substance Part	Recycling Category	Name	Address	Quantity	Unit
NA - 11	Nickel (and its compounds)	1A	Recovery of metals and metal compounds	Waxman Recycling Industries	96 Hyde Avenue Parkway, Toronto, Ontario, Canada	3.13	tonnes

Reasons for Adding or Removing Substance(s)

Special Reports

Pollution Prevention Plan

Plan was prepared or implemented for another government jurisdiction: No

Plan was prepared or implemented on a voluntary basis: No

Reasons no pollution prevention activities were completed: Activities were implemented in a previous year; additional activities are either unnecessary or unfeasible at this time

Feedback

Report Submission and Electronic Certification

Specify the language of correspondence: English

Company name: Weber Manufacturing Technologies Inc.

Certifying Official: Chris Edwards

Report Submitted by: Tim Logan

I, the Certifying Official or authorized delegate, agree with the statements above and acknowledge that by pressing the "Submit Selected Report(s)" button, I am electronically certifying and submitting the facility report(s) for the identified company to its affiliated programs.: Yes



ATTACHMENT 4
GREENHOUSE GAS ASSESSMENT

Quantification of GHG Emissions - Environment Canada and Ontario Ministry of the Environment Standard Quantification Methods

Chapter 2 - Quantification Methods for Fuel Combustion and Flaring

Weber Manufacturing - Manufacturing Facility

Date Completed: March 30, 2026 for calendar year 2025

Calculations of CO₂e releases from fossil fuel combustion are based on the standard quantification methods listed in the Environment Canada document entitled "Greenhouse Gas Reporting Program - Canada's Greenhouse Gas Quantification Requirements Version 8.0 - December 2024", specifically Chapter 2 Quantification Methods for Fuel Combustion and Flaring. The following equations from the aforementioned section were used to calculate releases of greenhouse gases from the fuels used at the site.

Carbon dioxide emissions from fossil fuels (except natural gas): Equation 2-2: Volume or Mass based Non-Variable Fuels Equation
 Carbon dioxide emissions from natural gas: Equation 2-9: Carbon Dioxide High Heat Value Method
 $CO_{2NG} = \text{Natural Gas Volume} \times (\text{SLOPE} \times \text{HHV} - \text{INTERCEPT}) \times 10^{-6}$
 Methane and nitrous oxide emissions from natural gas: Equation 2-12: CH₄ and N₂O High Heat Value Methods, in Energy Units

Other variables used in the determination of greenhouse gas emissions, including emission factors and high heating values, were also obtained from the above noted guidance document and are listed below. Note that the annual average high heat value for natural gas was obtained from Union Gas.

Fuel	Emission Factors			Heating Values			Natural gas burned	647,215 m ³
	CO ₂	CH ₄	N ₂ O	Fuel	HHV	Units		
Natural Gas	1966.86 g/m ³	0.98 g/GJ	0.87 g/GJ	Natural Gas	0.03904167	GJ/m ³	Diesel	0 L
Diesel (mobile)	2,681 g/L	0.073 g/L	0.02 g/L	Propane	25.66	GJ/kL	Propane burned	0 L
Propane	1515 g/L	0.024 g/L	0.108 g/L	Diesel	38.3	GJ/kL	Slope	66.2
							Intercept	617.7

Fuel	Calculated Releases (Tonnes)			Natural gas HHV																																																								
	CO ₂	CH ₄	N ₂ O																																																									
Natural Gas	1272.980	0.025	0.022	<table border="1"> <thead> <tr> <th>Location</th> <th>Year</th> <th>Month</th> <th>HHV (MJ/m³)</th> </tr> </thead> <tbody> <tr><td>ONTARIO</td><td>2025</td><td>1</td><td>39.2</td></tr> <tr><td></td><td>2025</td><td>2</td><td>39.2</td></tr> <tr><td></td><td>2025</td><td>3</td><td>39.2</td></tr> <tr><td></td><td>2025</td><td>4</td><td>39.1</td></tr> <tr><td></td><td>2025</td><td>5</td><td>39.0</td></tr> <tr><td></td><td>2025</td><td>6</td><td>39.0</td></tr> <tr><td></td><td>2025</td><td>7</td><td>39.1</td></tr> <tr><td></td><td>2025</td><td>8</td><td>38.8</td></tr> <tr><td></td><td>2025</td><td>9</td><td>38.9</td></tr> <tr><td></td><td>2025</td><td>10</td><td>38.7</td></tr> <tr><td></td><td>2025</td><td>11</td><td>39.1</td></tr> <tr><td></td><td>2025</td><td>12</td><td>39.2</td></tr> <tr><td></td><td></td><td>Average</td><td>39.042</td></tr> </tbody> </table>	Location	Year	Month	HHV (MJ/m ³)	ONTARIO	2025	1	39.2		2025	2	39.2		2025	3	39.2		2025	4	39.1		2025	5	39.0		2025	6	39.0		2025	7	39.1		2025	8	38.8		2025	9	38.9		2025	10	38.7		2025	11	39.1		2025	12	39.2			Average	39.042
Location	Year	Month	HHV (MJ/m ³)																																																									
ONTARIO	2025	1	39.2																																																									
	2025	2	39.2																																																									
	2025	3	39.2																																																									
	2025	4	39.1																																																									
	2025	5	39.0																																																									
	2025	6	39.0																																																									
	2025	7	39.1																																																									
	2025	8	38.8																																																									
	2025	9	38.9																																																									
	2025	10	38.7																																																									
	2025	11	39.1																																																									
	2025	12	39.2																																																									
		Average	39.042																																																									
Diesel (mobile)	0.000	0.000	0.000																																																									
Propane	0.000	0.000	0.000																																																									
Totals	1272.980	0.025	0.022																																																									
Global Warming Potential	1	28	265																																																									
CO ₂ e releases	1272.980	0.693	5.826																																																									
Combustion Total			1,279.499 tonnes																																																									
Total CO₂e Releases	1,279.499 tonnes																																																											
Reporting Threshold	10,000 tonnes																																																											
Does site exceed threshold?	No																																																											
Is reporting required?	Not Required																																																											

Ministry of the Environment,
Conservation and Parks

Ministère de l'Environnement,
de la Protection de la nature
et des Parcs

Financial Instruments Branch

Direction des instruments
financiers

40 St. Clair Ave. West
8th Floor
Toronto ON M4V 1M2

40, av. St. Clair Ouest
8^e étage
Toronto ON M4V 1M2



February 24, 2026

MEMORANDUM

To: Peter Mussio
Enbridge Gas Inc.

From: Eric Loi
Senior Engineer, Industrial Specialist

RE: 2025 Natural Gas Composition and Higher Heating Value Data

Thank you for your letter (enclosed) dated February 18, 2026, on the 2025 gas composition and higher heating value (HHV) data.

Ontario Regulation 390/18 (Greenhouse Gas Emissions: Quantification, Reporting and Verification) and the *Guideline for Quantification, Reporting and Verification of Greenhouse Gas Emissions* (Guideline) allows for the use of carbon content and fuel higher heating values in the calculation of greenhouse gas emissions from fuel combustion and flaring.

The provisions in the Guideline include the use of fuel sampling or results received from the fuel supplier at the minimum frequency of monthly for natural gas. The gas composition and higher heating value data for Enbridge Gas Inc. that is contained in your February 18, 2026 letter meets the minimum frequency requirements for fuel sampling and subject to the facility meeting all the other applicable requirements in the Guideline pertaining to the measurement of natural gas, the data can be used for the calculation of greenhouse gas emissions in applicable equations.

Thanks for your cooperation in providing this data for facilities to use in the calculation of 2025 greenhouse gas emissions.

Yours truly,

A handwritten signature in blue ink that reads "Eric Loi". The signature is written in a cursive, flowing style.

Eric Loi, P.Eng., M.Eng.

Cc. Davika Misir, Manager, Financial Instruments Branch, MECP
Encl.



February 18, 2026

Eric Loi, P. Eng., M. Eng.
Senior Engineer, Industrial Specialist
Ministry of Environment, Conservation and Parks
40 St. Clair Ave W, Foster Building
Toronto ON, M4V 1M2

Delivered by e-mail: eric.loi@ontario.ca

Dear Eric,

RE: 2025 Gas Composition and HHV Data

Enbridge Gas Inc is pleased to provide gas composition and higher heating value (HHV) information for the reporters who will be reporting in 2026 into the Ontario GHG reporting system. This is provided in the summary table below. We understand that that this information will be made available to facilities by the Ministry for use in calculations under Regulation 390/18 and information purposes.

Sincerely,

A handwritten signature in black ink, appearing to read 'Peter Mussio'.

Peter Mussio
Manager, Carbon Strategy Enbridge
Gas Inc
peter.mussio@enbridge.com



Enbridge Gas Inc 2025 Gas Composition and High Heating Value Data													
		Jan-25	Feb-25	Mar-25	Apr-25	May-25	Jun-25	Jul-25	Aug-25	Sep-25	Oct-25	Nov-25	Dec-25
Ontario: Typical Gas HHV													
Natural gas HHV (GJ/standard* m3)		0.0392	0.0392	0.0392	0.0391	0.0390	0.0390	0.0391	0.0388	0.0389	0.0387	0.0391	0.0392
Ontario: Typical Gas Composition													
methane	mole %	93.73	93.55	93.50	93.81	94.01	93.41	93.42	94.62	94.22	94.83	94.06	92.95
ethane	mole %	5.17	5.28	5.43	5.13	5.00	5.45	5.48	4.45	4.74	4.12	5.05	5.74
propane	mole %	0.23	0.24	0.20	0.18	0.12	0.10	0.11	0.11	0.11	0.11	0.19	0.22
butanes	mole %	0.05	0.06	0.03	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.03	0.04
pentanes	mole %	0.02	0.02	0.01	0.01	0.00	0.01	0.00	0.00	0.00	0.00	0.01	0.01
hexanes+	mole %	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01
nitrogen	mole %	0.48	0.49	0.50	0.46	0.41	0.41	0.43	0.36	0.38	0.40	0.39	0.70
carbon dioxide	mole %	0.30	0.33	0.29	0.35	0.44	0.58	0.53	0.43	0.52	0.52	0.26	0.31
oxygen	mole %	0.01	0.01	0.01	0.01	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.01
hydrogen	mole %	0.01	0.01	0.02	0.01	0.00	0.00	0.00	0.01	0.00	0.01	0.01	0.01
Total	mole %	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
*Standard conditions: 15° Celsius, 101.325 kPa													
Analysis for determination of typical gas composition is done in accordance with GPA standards 2261 and 2286. Calculation of typical HHV is done in accordance using GPA standards 2145 and 2172, as required by Measurement Canada for trade applications.													
While every effort has been made to ensure the accuracy of this information, Enbridge Gas Inc does not warrant accuracy of the information for any purpose. Enbridge Gas Inc provides no guarantee regarding gas composition or high heating value (HHV) for any specific delivery point. It is the responsibility of the information user to ensure that the data meets the applicable regulatory requirements.													